

SCENE™

COLORBODY™ PORCELAIN

FLOOR



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

SCENE™

With intriguing mixed stone visuals, Scene Colorbody™ Porcelain delivers exquisite depth and visual variation for both commercial and residential applications. In addition to the striking aesthetics, Scene's elongated planks, which reach 48 inches in length, are a first for American Olean. Decorative accents feature a graphical interpretation of patterns found in nature. Available in two finishes, four colors and five sizes, Scene brings bold options to the design table.

Photo features Scene in Shore in 12 x 48 Unpolished on the floor.

FIELD TILE



CREST SC01 - UNPOLISHED



SHORE SC02 - UNPOLISHED



RIDGE SC03 - UNPOLISHED



HORIZON SC04 - UNPOLISHED



CREST SC01 - LIGHT POLISHED



SHORE SC02 - LIGHT POLISHED



RIDGE SC03 - LIGHT POLISHED



HORIZON SC04 - LIGHT POLISHED

4 x 24 DECORATIVE ACCENT



CREST SC01



SHORE SC02




RIDGE SC03



HORIZON SC04

SIZES, SHADE VARIATION & PRICING

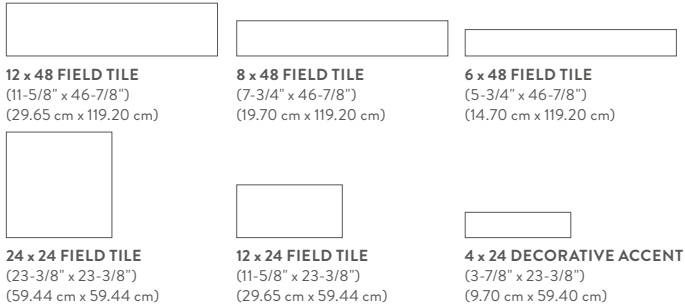

12 x 48 FIELD TILE
(11-5/8" x 46-7/8")
(29.65 cm x 119.20 cm)

8 x 48 FIELD TILE
(7-3/4" x 46-7/8")
(19.70 cm x 119.20 cm)

6 x 48 FIELD TILE
(5-3/4" x 46-7/8")
(14.70 cm x 119.20 cm)

24 x 24 FIELD TILE
(23-3/8" x 23-3/8")
(59.44 cm x 59.44 cm)

12 x 24 FIELD TILE
(11-5/8" x 23-3/8")
(29.65 cm x 59.44 cm)

4 x 24 DECORATIVE ACCENT
(3-7/8" x 23-3/8")
(9.70 cm x 59.40 cm)



TILE THICKNESS: 3/8" (12 x 24, 24 x 24)
7/16" (6 x 48, 8 x 48, & 12 x 48)
RECOMMENDED GROUT JOINT:
1/8" (3/16" when multiple sizes are installed in a modular pattern, and when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)
RELATIVE PRICING: High

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE
Unpolished	< 0.5%	> 450 lbs.	8.0	Resistant
Light Polished	< 0.5%	> 450 lbs.	8.0	Resistant

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Sanded grout
- Sanded cement grout
- Epoxy grout

TRIM



BULLNOSE
S-43C9
3 x 12

COVE BASE
S-36C9
6 x 12

COVE OUTCORNER
SC-36C9
6 x 1

Bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

FLOOR APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.americanolean.com/dcof.

OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●
Pool Linings	○

APPLICATION NOTES:

Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Light Polished surface is suitable only for Dry & Level floor applications.

NOTES

SPECIAL INSTALLATION REQUIREMENT: For proper bonding, medium bed mortar should be utilized in installing tiles with a dimensional length size greater than 20 x 20, large rectangles or tiles with greater dimensional thickness than normal. Back buttering tiles of this nature in the installation process will also assure proper coverage for bonding.

Since there is shade variation in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thinset is recommended for installation.

For additional information, refer to "Factors to Consider" at <http://americanolean.com/factors-to-consider.cfm>.

