



HORIZON™

GLAZED CERAMIC WITH REVEAL IMAGING®

WALL



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

HORIZON™

Soft linear graphics imitate the sweeping strokes of watercolors in the Horizon collection by American Olean®. Available in four neutral hues and a large format linear design, this elegant series can be used as a dramatic feature wall or a striking accent to add subtle depth and dimension to any design vision.

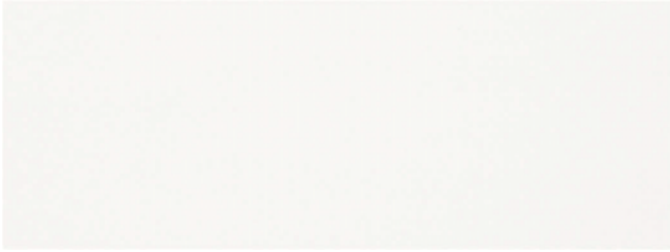


Photo features Horizon Taupe 6 x 16 wall tile on the wall.

HORIZON™

GLAZED CERAMIC WITH REVEAL IMAGING®

WALL TILE



WHITE HZ01



GREY HZ04



BEIGE HZ02



TAUPE HZ03

1/2 X 12 JOLLY



WHITE HZ01



GREY HZ04



BEIGE HZ02



TAUPE HZ03

HORIZON™

GLAZED CERAMIC WITH REVEAL IMAGING®

SIZES, SHADE VARIATION & PRICING



6 x 16 WALL TILE
(5-7/8" x 15-3/4")
(15.00 cm x 40.00 cm)



LOW
(V1)

TILE THICKNESS: 5/16"
RECOMMENDED GROUT JOINT: 1/16" (1/8" when installed in a staggered brick-joint pattern; overlap should not exceed 33%)
RELATIVE PRICING: Medium

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Wall	< 20.0%	120 - 230 lbs.	4.0 - 6.0	Resistant	-N/A-

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Unsanded grout
- Epoxy grout

TRIM

1/2 x 12 JOLLY
(1/2" x 11-15/16")
(1.25 cm x 30.00 cm)

APPLICATIONS

	SUITABLE
Walls/Backsplashes	<input checked="" type="radio"/>
Countertops	<input type="radio"/>
Pool Linings	<input type="radio"/>

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

Cover photo features Horizon Taupe 6 x 16 wall tile on the wall and Infusion™ Brown Fabric 12 x 24 field tile on the floor.

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information, refer to "Factors to Consider" at americanolean.com/Factors.



REVEAL IMAGING®



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2017 AMERICAN OLEAN (02/17)



AMERICAN OLEAN®
PROVEN IN TILE™