



CASTLEGATE™

GLAZED PORCELAIN FLOOR, GLAZED CERAMIC WALL & MOSAIC

FLOOR
& WALL



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

CASTLEGATE™

Inspired by natural stone, Castlegate provides a rustic visual in three warm colors. The porcelain floor tile offered with a coordinating ceramic wall and mosaic tile work beautifully together in both residential and light commercial installations.



Photo features Castlegate Gray 9 x 12 wall tile with Universal 2 x 2 mosaic on the backsplash.

CASTLEGATE™

GLAZED PORCELAIN FLOOR, GLAZED CERAMIC WALL & MOSAIC

GLAZED PORCELAIN FLOOR TILE



BEIGE CG15



GRAY CG16



BROWN CG17

9 x 12 GLAZED CERAMIC WALL TILE



BEIGE CG15




GRAY CG16



BROWN CG17

2 x 2 GLAZED CERAMIC MOSAIC

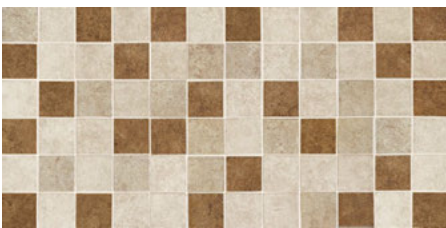


UNIVERSAL MOSAIC CG18
(AVAILABLE IN BLEND ONLY)


CASTLEGATE™

GLAZED PORCELAIN FLOOR, GLAZED CERAMIC WALL & MOSAIC


SIZES, SHADE VARIATION & PRICING




18 x 18 FLOOR TILE
(17-3/4" x 17-3/4")
(45.20 cm x 45.20 cm)



12 x 12 FLOOR TILE
(11-13/16" x 11-13/16")
(30.00 cm x 30.00 cm)




9 x 12 WALL TILE
(9" x 12")
(22.91 cm x 30.54 cm)



2 x 2 MOSAIC ■ ■
(12 x 24 Sheet)
(30.48 cm x 60.96 cm Sheet)

■ Dot-mounted
□ Ceramic body



HIGH (V3)

TILE THICKNESS: 5/16" Floor & Wall, 1/4" Mosaic
RECOMMENDED GROUT JOINT: 3/16" Floor (overlap should not exceed 33% when installing tile with a length of 15" or greater in a staggered brick-joint pattern)
1/16" Wall, 1/8" Mosaic
RELATIVE PRICING: Low

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Floor	< 0.5%	> 275 lbs.	8.0	Resistant	4
Wall	< 20.0%	120 - 230 lbs.	4.0 - 6.0	Resistant	N/A
Mosaic	< 3.0%	> 250 lbs.	8.0	Resistant	4

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board


SETTING

- Latex modified thin-set
- Epoxy


GROUTING

- Sanded grout for Floor & Mosaic
- Unsanded grout for Wall
- Epoxy grout


TRIM




FLOOR BULLNOSE
P-43C9
3 x 12



WALL BULLNOSE □
S-4309 (9" side)
3 x 9



WALL BULLNOSE CORNER □
SN-4309
3 x 3



MOSAIC BULLNOSE □
S-886
2 x 2

□ Ceramic body
Floor bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

FLOOR APPLICATIONS

(EXCLUDES WALL TILE)	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●**
Pool Linings	●***

APPLICATION NOTES:

* Field tile and mosaic suitable. Mosaic also suitable for residential and light commercial shower floors.

** Does not apply to wall tile

*** Mosaic only

Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Wall tile & mosaic suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

Cover photo features Castlegate Gray 18 x 18 floor tile on the floor and Gray 9 x 12 wall tile with Universal 2 x 2 mosaic on the backsplash.

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for proper installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

All or select items within this series are made in the USA. For more information visit americanolean.com/MadeInUSA.

For additional information, refer to "Factors to Consider" at americanolean.com/Factors.



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



AMERICAN OLEAN
PROVEN IN TILE™



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE
©2016 AMERICAN OLEAN (10/16)



AMERICAN OLEAN
PROVEN IN TILE™