



# MIRASOL™

GLAZED PORCELAIN FLOOR, MOSAIC & GLAZED CERAMIC WALL WITH REVEAL IMAGING®

FLOOR & WALL



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM

# MIRASOL™

GLAZED PORCELAIN FLOOR, MOSAIC & GLAZED CERAMIC WALL WITH REVEAL IMAGING®

Mirasol™ is an elegant porcelain floor, mosaic and glazed ceramic wall series with the clean, classic beauty of natural marble. Designs come alive with the incredible color and veining created by Reveal Imaging® technology. The color palette consists of popular marble looks and colors: Bianco Carrara, Crema Laila and Silver Marble. The floor sizes and mosaic have a soft matte finish, while the coordinating wall sizes have a glossy finish. Mirasol is an ideal option for those who desire the beauty of marble with the long-lasting durability and ease of maintenance of porcelain and ceramic tile at a compelling price alternative to natural marble.

## GLAZED PORCELAIN FLOOR TILE

---



BIANCO CARRARA ML70



CREMA LAILA ML71



SILVER MARBLE ML72

## GLAZED CERAMIC WALL TILE


---



BIANCO CARRARA ML70



CREMA LAILA ML71

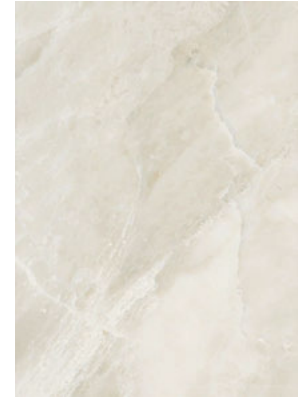

SILVER MARBLE ML72

## 2 x 4 BRICK-JOINT GLAZED PORCELAIN MOSAIC

---



BIANCO CARRARA ML70



CREMA LAILA ML71




SILVER MARBLE ML72

# MIRASOL™

GLAZED PORCELAIN FLOOR, MOSAIC & GLAZED CERAMIC WALL WITH REVEAL IMAGING®

## SIZES, SHADE VARIATION & PRICING



**24 x 24 FLOOR TILE \***  
(23-7/16" x 23-7/16")  
(59.44 cm x 59.44 cm)



**12 x 24 FLOOR TILE \***  
(11-5/8" x 23-7/16")  
(29.56 cm x 59.44 cm)



**12 x 12 FLOOR TILE \***  
(11-1/2" x 11-1/2")  
(29.56 cm x 29.56 cm)



**12 x 24 WALL TILE □**  
(11-5/8" x 23-7/16")  
(29.56 cm x 59.44 cm)



**10 x 14 WALL TILE □**  
(9-13/16" x 13-3/4")  
(25.00 cm x 35.00 cm)



**2 x 4 BRICK-JOINT MOSAIC ■**  
(12" x 12" Sheet)  
(30.48 cm x 30.48 cm Sheet)

- \* Floor field tile sizes are modular
- Mesh-mounted
- Ceramic body



**HIGH**  
(V3)

**TILE THICKNESS:** 3/8"

**RECOMMENDED GROUT JOINT:** Floor & Mosaic 1/8"  
(3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%), 12" x 24" Wall 1/8" (3/16" when installed in a staggered brick-joint pattern. Overlap should not exceed 33%), 10" x 14" Wall 1/16"

**RELATIVE PRICING:** Medium

## PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Floor & Mosaic	< 0.5%	> 275 lbs.	8.0	Resistant	4
Wall	< 20.0%	120 - 230 lbs.	4.0 - 6.0	Resistant	N/A

### CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

### INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

### SETTING

- Latex modified thin-set
- Epoxy

### GROUTING

- Sanded grout for floor & mosaic
- Unsanded grout for wall
- Epoxy grout

## NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2016 AMERICAN OLEAN (09/16)



AMERICAN OLEAN®  
PROVEN IN TILE™

## TRIM



**FLOOR BULLNOSE**  
S-43C9F  
3 x 12



**WALL BULLNOSE □**  
S-43C9WX (12" side)  
3 x 12



**WALL BULLNOSE □**  
S-4310 (10" side)  
3 x 10



**WALL BULLNOSE OUTCORNER □**  
SN-4310  
3 x 3

- Ceramic body

Floor bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

## FLOOR APPLICATIONS

(EXCLUDES WALL TILE)	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

## OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●**
Pool Linings	●***

### APPLICATION NOTES:

\* Field tile and mosaic suitable. Additionally, mosaic suitable for residential and commercial floors including residential and light commercial shower floors

\*\* Floor and mosaic tile only

\*\*\* Mosaic only

Floor tile and mosaic suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Wall tile suitable for exterior applications in non-freezing climates only when proper installation methods are followed.



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®



TRU-EDGE

