

ULTRA MODERN™

COLORBODY™ PORCELAIN

FLOOR



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

ULTRA MODERN™

With a contemporary visual and an appealing commercial color palette, Ultra Modern™ is sure to become a go-to product for large-scale projects requiring a combination of form, function, and cost efficiency. This double-load porcelain tile offers a consistency of visual that most minimalist design schemes demand. TruEdge™ rectification means tighter grout joints, while two finish treatments—polished and unpolished—offer design versatility. Six hues ranging from Infinite Cream to Futuristic Black comprise the sophisticated color palette.

Photo features Ultra Modern in Beyond Beige in 24 x 24 Unpolished on the floor.

ULTRA MODERN™

COLORBODY™ PORCELAIN

POLISHED



INFINITE CREAM UM05



BEYOND BEIGE UM06



PROGRESSIVE GRAY UM07



VISIONARY BROWN UM08



ADVANCED CHARCOAL UM09



FUTURISTIC BLACK UM10

UNPOLISHED



INFINITE CREAM UM05



BEYOND BEIGE UM06




PROGRESSIVE GRAY UM07



VISIONARY BROWN UM08



ADVANCED CHARCOAL UM09

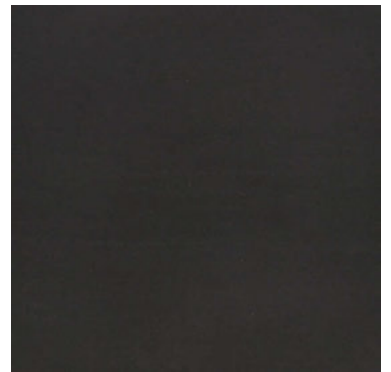


FUTURISTIC BLACK UM10

ULTRA MODERN™

COLORBODY™ PORCELAIN

SIZES, SHADE VARIATION & PRICING



24 x 24 FLOOR TILE
(23-3/8" x 23-3/8")
(59.44 cm x 59.44 cm)



12 x 24 FLOOR TILE
(11-5/8" x 23-3/8")
(29.56 cm x 59.44 cm)



MEDIUM
(V2)

TILE THICKNESS: 3/8"
RECOMMENDED GROUT JOINT: 1/8" (3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%)
RELATIVE PRICING: Medium

TRIM (UNPOLISHED ONLY)



FLOOR BULLNOSE
S-43C9
3 x 12



COVE BASE
S-36C9T
6 x 12



COVE OUTCORNER
SC-36C9T
6 x 1

Floor bullnose, cove base and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE
Polished & Unpolished	< 0.5%	> 275 lbs.	8.0	Resistant

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Sanded grout
- Epoxy grout

FLOOR APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●
Pool Linings	○

APPLICATION NOTES:

Polished finish suitable for dry & level floor applications only.

* Unpolished finish only

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Cover photo features Ultra Modern Beyond Beige in 24 x 24 Unpolished on the floor.

NOTES

Manufacturer Advisory: (Polished) These tiles have a dynamic coefficient of friction < 0.42 as measured by the DCOF AcuTest™ method. Tiles with DCOF values < 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special consideration must be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at americanolean.com/Factors.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2017 AMERICAN OLEAN (02/17)



AMERICAN OLEAN®
PROVEN IN TILE™