STYLED IN ITALY. PROUDLY AMERICAN.

RIDGE










COLORED BODY PORCELAIN STONEWARE



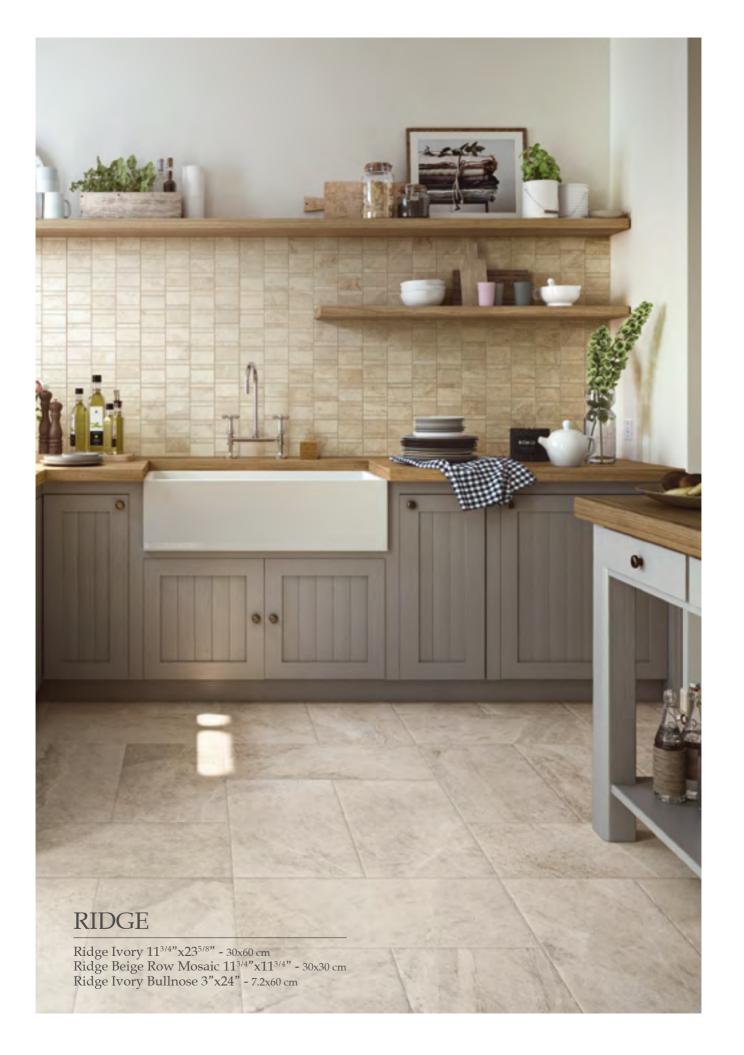

RIDGE

COLORED BODY PORCELAIN STONEWARE



Ivory



Beige



Greige



Anthracite

RIDGE

COLORED BODY PORCELAIN STONEWARE

RIDGE

Ridge Beige 11^{3/4}"x23^{5/8}" - 30x60 cm Ridge Beige Cove Base 6"x12" - 15x30 cm

REDEEM

Redeem Ash 7^{6/8}"x39^{3/8}" - 20x100 cm











RIDGE

Ridge Greige $11^{3/4}$ "x $23^{5/8}$ " - 30x60 cm Ridge Greige Bullnose 3"x24" - 7.2x60 cm



SIZE - THICKNESS

 $11^{3/4}$ "x $23^{5/8}$ " - 30x60 cm \neq 9 mm

FINISH

MATTE



RIDGE Ivory 11^{3/4}"x23^{5/8}" - 30x60 cm



RIDGE Beige 11^{3/4}"x23^{5/8}" - 30x60 cm



RIDGE Greige 11^{3/4}"x23^{5/8}" - 30x60 cm



RIDGE Anthracite 11^{3/4}"x23^{5/8}" - 30x60 cm

MOSAICS



RIDGE Ivory Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Mosaic 2"x2")



RIDGE Beige Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Mosaic 2"x2")



RIDGE Greige Mosaic 11^{3/4}" x11^{3/4}" - 30x30 cm (Mosaic 2"x2")



RIDGE Anthracite Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Mosaic 2"x2")



RIDGE Ivory Row Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Row Mosaic 2"x4")



RIDGE Beige Row Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Row Mosaic 2"x4")



RIDGE Greige Row Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Row Mosaic 2"x4")



RIDGE Anthracite Row Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm (Row Mosaic 2"x4")



MODERATE VARIATION


















RIDGE

Ridge Beige Row Mosaic 113/4" x113/4" - 30x30 cm

COORDINATING TRIMS











Bullnose 3"x 24" - 7.2x60 cm



Cove base 6"x12" - 15x30 cm





PORCELAIN W VOC Member of FREE

COLORED BODY PORCELAIN STONEWARE





Compliant with standards ANSI A137.1-2012

SIZE - THICKNESS

11^{3/4}"x 23^{5/8}" - 30x60 cm ₹ 9 mm

FINISH

MATTE

FIELD TILES - Available in all colors



Nominal size (in)	Thickness (mm)	Finish
11 3/4" x 23 5/8"	9 mm	Matte

MODERATE VARIATION

While the colors and/or texture present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

MOSAICS AND COORDINATING TRIMS - Available in all colors

	Nominal size (in)	Thickness (mm)	Finish
Mosaic 2"x2"	11 3/4" x 11 3/4"	9 mm	Matte
Row Mosaic 2"x4"	11 3/4" x 11 3/4"	9 mm	Matte
Bullnose 3"x24"	2 7/8" x 23 5/8"	9 mm	Matte
Cove Base 6"x12"	5 7/8" x 11 3/4"	8.5 mm (*)	Matte

Please refer to caliber chart for work sizes. Close joints are not recommended.

(*): Cove Base thickness is 7 mm on flat top part.

PERFORMANCE & FEATURES

				Porcelain Tile Specification				
		PROPERTY	ASTM TEST METHOD	Calibrated		Rectified		DIDOF
		PROPERTY		Minimum	Maximum	Minimum	Maximum	RIDGE
REGULARITY CHARACTERISTICS		Nominal Size	ASTM C499	-3.00%	3.00%	-3.00%	2.00%	Compliant
		Caliber Range (Variation from average facial dimension of sample)		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant
		Thickness (1)		N/A	Range: 0.40 in (1.02 mm)	N/A	Range: 0.40 in (1.02 mm)	Compliant
		Wedging	ASTM C502	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant
		Warpage Edge	ASTM C485	-0.75% or -0.09 in (-2.3 mm) (*)	0.75% or 0.09 in (2.3 mm) (*)	-0.40% or -0.05 in (-1.3 mm) ⁽²⁾ or -1.8 mm ⁽³⁾ (*)	0.40% or 0.05 in (1.3 mm) ^[2] or 1.8 mm ^[3] (*)	Compliant
		Warpage Diagonal		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.40% or -0.07 in (-1.8 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	Compliant
			All Porcelain Tiles					
STRUCTURAL CHARACTERISTICS		Water Absorption	ASTM C373	≤ 0.5%				≤ 0.5%
BULK MECHANICAL CHARACTERISTICS	<u>↓</u>	Breaking strenght	ASTM C648	Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN)				≥ 350 lbf. avg
PHISICAL PROPERTIES		Bond Strength	ASTM C482		≥ 100 psi			
THERMAL AND IGROMETRIC CHARACTERISTICS	紫	Resistance to Freeze/ Thaw Cycling	ASTM C1026	As Reported				Resistant
CHEMICAL CHARACTERISTICS	5	Chemical Resistance	ASTM C650	As Reported				Unaffected
		Stain Resistance	ASTM C1378	As Reported			Unaffected	
SAFETY CHARACTERISTICS		Dynamic coefficient of friction	DCOF	Requires a minimum value of 0.42 for commercial areas that are likely to be wet				> 0,42 Wet

- (*) Whichever is less
 (1) May not apply to textured surfaces or tiles with uneven back patterns.
 (2) Whichever is less, for tiles up to 24*x24" (610 mm x 610 mm).
 (3) Applies to tiles larger than 24*x24" (610 mm x 610 mm).

Atlas Concorde reserves the right to modify any product without notice and will not be liable for any direct or indirect damage resulting from such modifications. Colors and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. For information and details relating to codes, packaging and weight it is recommended to refer to the latest pricelist.

Atlas Concorde Usa, Inc. 117 Seaboard Lane - Suite 170 Franklin, TN 37067 - USA