



FLOOR

# HARVEST GROVE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC WITH REVEAL IMAGING®



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM



# HARVEST GROVE™

Harvest Grove by American Olean® evokes the charm of wood to bring an inviting linear design to floor and wall applications. Designed with Reveal Imaging®, the collection is crafted from glazed porcelain and features a textured, grained visual, creating an inviting warmth and vibrancy. Available in four organically rich colors, Harvest Grove defines both residential and commercial settings with rustically chic appeal.

Photo features Harvest Grove Walnut 6 x 24 field tile on the floor.

# HARVEST GROVE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC WITH REVEAL IMAGING®

## FIELD TILE

---



CASHEW HG03



PECAN HG04



CHERRY HG05




WALNUT HG06

## 2 x 2 GLAZED CERAMIC MOSAIC

---



CASHEW HG03

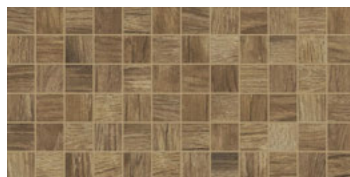

PECAN HG04



CHERRY HG05




WALNUT HG06

# HARVEST GROVE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC WITH REVEAL IMAGING®

## SIZES, SHADE VARIATION & PRICING

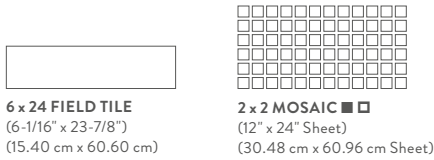

**6 x 24 FIELD TILE**  
(6-1/16" x 23-7/8")  
(15.40 cm x 60.60 cm)

**2 x 2 MOSAIC** ■ ■ □ □  
(12" x 24" Sheet)  
(30.48 cm x 60.96 cm Sheet)

- Dot-mounted
- Ceramic body



**HIGH**  
(V3)

**TILE THICKNESS:** 5/16" Field, 1/4" Mosaic  
**RECOMMENDED GROUT JOINT:** 3/16" Floor (overlap should not exceed 33% when installing tile with a length of 15" or greater in a staggered brick-joint pattern), 1/8" Mosaic  
**RELATIVE PRICING:** Low to Medium

## PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Field	< 0.5%	> 275 lbs.	8.0	Resistant	3
Mosaic	< 3.0%	> 250 lbs.	8.0	Resistant	3

### CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

### INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

### SETTING

- Latex modified thin-set
- Epoxy

### GROUTING

- Sanded grout
- Epoxy grout

## FLOOR APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

## OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●
Pool Linings	●**

### APPLICATION NOTES:

\* Field tile and mosaic suitable. Mosaic also suitable for residential and light commercial shower floors.

\*\* Mosaic only

Field tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Mosaic suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

Cover photo features Harvest Grove Walnut 6 x 24 field tile on the floor.

## NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

All or select items within this series are made in the USA. For more information visit [americanolean.com/MadeInUSA](http://americanolean.com/MadeInUSA).

For additional information, refer to "Factors to Consider" at [americanolean.com/Factors](http://americanolean.com/Factors).



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2017 AMERICAN OLEAN (02/17)



AMERICAN OLEAN®  
PROVEN IN TILE™