
# DARE BOBE




COLORBODY™ PORCELAIN STONEWARE

RECTIFIED | 3D PRINTING TECHNIQUE



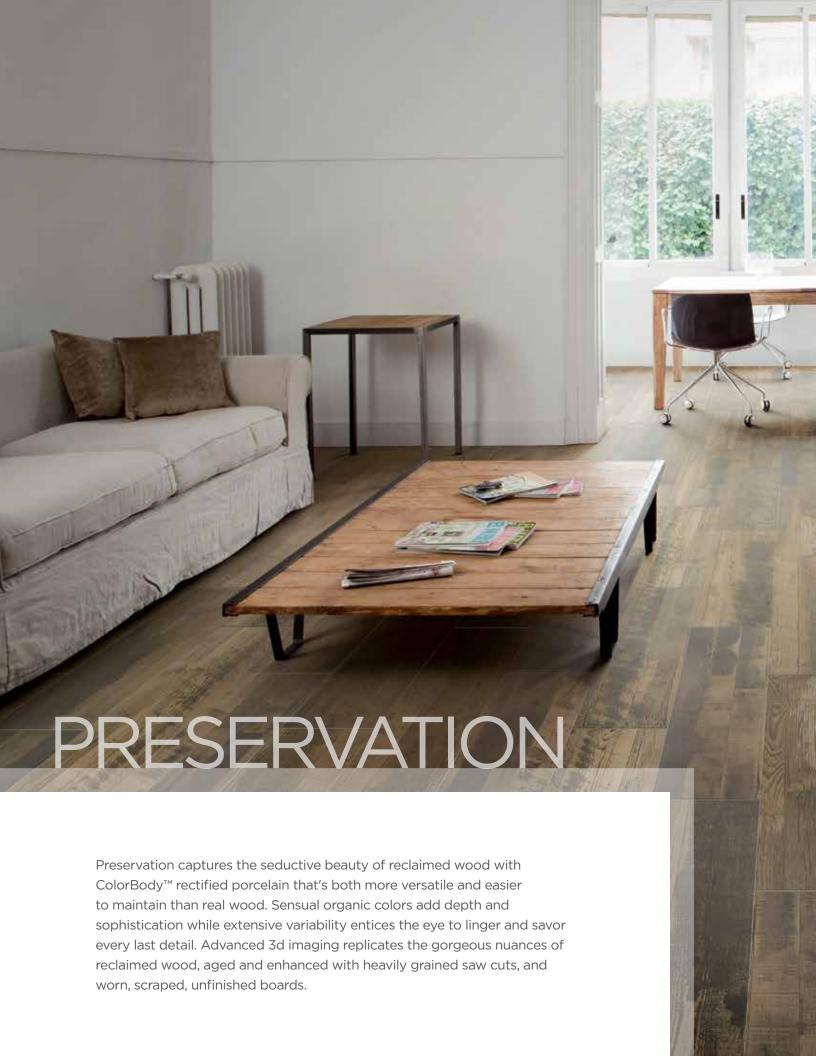



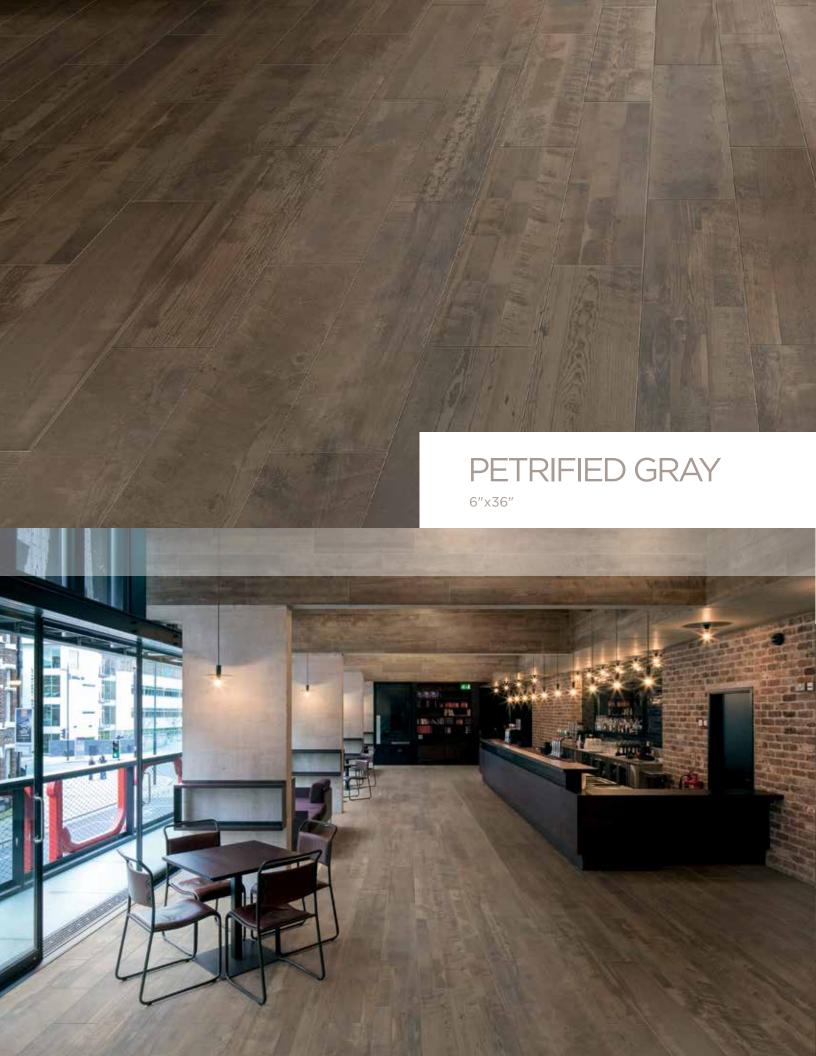



# COLORBODY™ PORCELAIN STONEWARE

## RECTIFIED | 3D PRINTING TECHNIQUE

#### Distressed Oak









PR24 Distressed Oak

#### Petrified Gray





PR26 Petrified Gray



PR26 Petrified Gray 6"x36"

# **APPLICATIONS**

	Institutional	Commercial	Residential	
Floors		•	•	
Walls & Backsplashes	•	•	•	
Countertops	•	•	•	

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

# PERFORMANCE CHARACTERISTICS

	Moisture Absorption	Breaking Strength	MOH'S	Chemical Resistance	Abrasion Resistance
Floor Tile	< 0.50%	> 275 lbs.	8	Resistant	III (PR25 & PR26) IV (PR24)



Floor Tile



Wall Tile



3d Printing Technique



Rectified Tile



V3 High Variation







D.C.O.F. (Wet Areas)

Frost Resistant

Abrasion Resistance

Pre-Consumer Recycled Content



# PRESERVATION

### Aged Walnut









PR25 Aged Walnut 6"x36"

# **PACKAGING**

A HABAZZI	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Floor Tile	6" × 36"	9	12.69	63	3/8" (10mm)
Floor Tile	9" x 36"	6	12.96	63	3/8" (10mm)

COMMANDA I	Sizes	Ctn	Sq. Ft.	Weight (lbs.)
Floor Tile	6" x 36"	39	494.91	2457
Floor Tile	9" x 36"	36	466.56	2268



digital design definition definition definition described by the design capabilities at maximum resolution.



7834 C.F. Hawn Freeway Dallas, Texas 75217

www.marazzitile.com contact@marazzitile.com

©2015 Marazzi | 05.15 | Z864PNBRO Preservation™ Brochure



SCAN QR CODE FOR PRODUCT INFORMATION