



CERTIFIED  
**PORCELAIN**  
 TILE  
A PART OF THE TILE INDUSTRY ASSOCIATION

# BORDEAUX™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL  
 & MOSAIC TILE WITH REVEAL IMAGING™

FLOOR & WALL



AMERICAN OLEAN®  
 PROVEN IN TILE™

AMERICANOLEAN.COM

# BORDEAUX™

Distinctive detailing offered in a variety of sizes make this modular floor field tile the product of choice for design versatility. Add a coordinating glazed ceramic wall tile, mosaic or accent for a timeless floor and wall duo.



Photo features Bordeaux in Chameau 10 x 14 wall tile with 2 x 10 wall accent.

# BORDEAUX™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL  
& MOSAIC TILE WITH REVEAL IMAGING™

## GLAZED PORCELAIN FLOOR TILE

---



CRÉME BD01



CHAMEAU BD02



MARRON BD03

## GLAZED CERAMIC WALL TILE

---



CRÉME BD01



CHAMEAU BD02



MARRON BD03

## 3 x 3 GLAZED CERAMIC MOSAIC


---



CRÉME BD01



CHAMEAU BD02

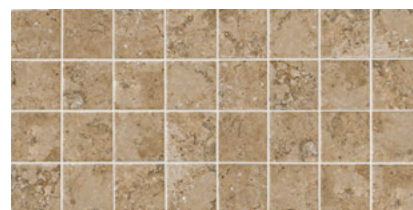

MARRON BD03

## DECORATIVE ACCENTS

---



UNIVERSAL BD99  
3 x 13 Floor Accent




UNIVERSAL BD99  
2 x 10 Wall Accent

# BORDEAUX™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC TILE WITH REVEAL IMAGING™

## SIZES, SHADE VARIATION & PRICING



**20 x 20 FIELD TILE \***  
(19-3/4" x 19-3/4")  
(50.20 cm x 50.20 cm)




**13 x 20 FIELD TILE \***  
(13-1/8" x 19-3/4")  
(33.30 cm x 50.20 cm)



**13 x 13 FIELD TILE \***  
(13-1/8" x 13-1/8")  
(33.30 cm x 33.30 cm)



**6-1/2 x 6-1/2 FIELD TILE \***  
(6-1/2" x 6-1/2")  
(16.40 cm x 16.40 cm)



**3 x 3 MOSAIC ■ □**  
(12" x 24" Sheet)  
(30.48 cm x 60.96 cm Sheet)



**10 x 14 WALL TILE □**  
(9-13/16" x 13-15/16")  
(24.99 cm x 35.40 cm)



**4 x 8 WALL TILE □**  
(4-1/4" x 8-8/16")  
(10.89 cm x 21.82 cm)



**3 x 13 ACCENT □**  
(3" x 13-1/8")  
(7.60 cm x 33.30 cm)



**2 x 10 WALL ACCENT □**  
(2" x 9-27/32")  
(5.06 cm x 25.00 cm)

- \* Floor field tile sizes are modular when same caliber is used.
- Pressed mosaic is dot-mounted on 12 x 24 sheets.
- Ceramic body.



**TILE THICKNESS:** 5/16" Floor & Wall, 1/4" Mosaic  
**RECOMMENDED GROUT JOINT:** 3/16" Floor (when rectangular size is used in a staggered brick-joint pattern, the overlap should not exceed 33%), 1/16" Wall, 1/8" Mosaic  
**RELATIVE PRICING:** Medium

## PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Floor	< 0.5%	> 275 lbs.	8.0	Resistant	4
Wall	< 20.0	120 - 230 lbs.	4.0 - 6.0	Resistant	N/A
Mosaic	< 3.0%	> 250 lbs.	8.0	Resistant	4

### CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

### INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

### SETTING

- Latex modified thin-set
- Epoxy

### GROUTING

- Sanded grout for Floor & Mosaic
- Unsanded grout for Wall
- Epoxy grout

Cover photo features Bordeaux Chameau in 20 x 20, 13 x 20, 13 x 13 and 6-1/2 x 6-1/2 on the floor and Bordeaux Chameau wall tile in 10 x 14 with Universal wall accent in 2 x 10 on the backsplash.

## NOTES

**SPECIAL INSTALLATION REQUIREMENT:** For proper bonding, medium bed mortar should be utilized in installing tiles with a dimensional length size greater than 20 x 20, large rectangles or tiles with greater dimensional thickness than normal. Back buttering tiles of this nature in the installation process will also assure proper coverage for bonding.

Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.

Since there is shade variation in all ired ceramic products, the tile and trim supplied for your particular installation may not match these

samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Use of a latex modified thin-set is recommended for proper installation.

All or select items within this series are made in the USA. For more information visit [www.americanolean.com](http://www.americanolean.com).

For additional information, refer to "Factors to Consider" at <http://americanolean.com/factors-to-consider.cfm>.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2016 AMERICAN OLEAN (06/16)



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING™



AMERICAN OLEAN®  
PROVEN IN TILE™

## TRIM



**FLOOR BULLNOSE †**  
P-43E9  
3 x 13



**WALL BULLNOSE □**  
S-4489 (8" side)  
4 x 8



**WALL BULLNOSE □**  
S-4849 (4" side)  
4 x 8



**WALL BULLNOSE □**  
**OUTCORNER LEFT OR RIGHT**  
SCR/L-4489  
4 x 8



**WALL BULLNOSE □**  
S-4310 (10" side)  
3 x 10



**WALL BULLNOSE**  
**OUTCORNER □**  
SN-4310  
3 x 3

- † Ceramic body.

† Floor bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

## FLOOR APPLICATIONS

(EXCLUDES WALL TILE)	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit [www.americanolean.com/dcof](http://www.americanolean.com/dcof).

## OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●*
Pool Linings	●**

### APPLICATION NOTES:

\* Does not apply to wall tile.

\*\* 6-1/2 x 6-1/2 & mosaic only.

Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Wall tile & Mosaics suitable for exterior applications in non-freezing climates only when proper installation methods are followed.