

CONCRETE CHIC™

GLAZED PORCELAIN WITH REVEAL IMAGING™

FLOOR



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

CONCRETE CHIC™

GLAZED PORCELAIN WITH REVEAL IMAGING™

American Olean's new Concrete Chic refreshes the popular stained cement aesthetic with updated graphics and a contemporary color palette in a product that is made in the USA with recycled content. As at home in modern residential settings as in commercial spaces, Concrete Chic is sure to capture attention.

FLOOR TILE




CURRENT CREAM CC65



TRENDY TAN CC66



ELEGANT GRAY CC67

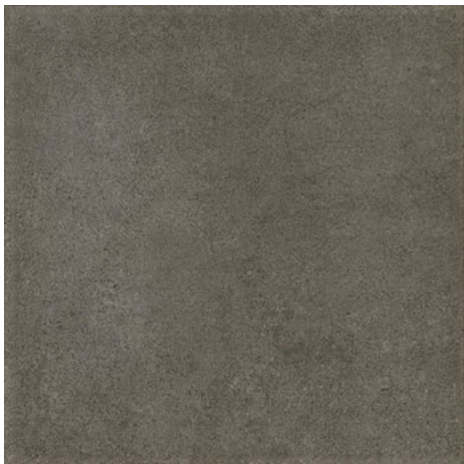

STYLISH CHARCOAL CC68



VOGUE BROWN CC69



Photo features Concrete Chic in Elegant Gray in 12 x 24 on the floor.

CONCRETE CHIC™

GLAZED PORCELAIN WITH REVEAL IMAGING™

SIZES, SHADE VARIATION & PRICING



12 x 24 FIELD TILE
(11-13/16" x 23-13/16")
(30.00 cm x 60.48 cm)



12 x 12 FIELD TILE
(11-13/16" x 11-13/16")
(30.00 cm x 30.00 cm)



HIGH
(V3)

TILE THICKNESS: 5/16" (12 x 12), 3/8" (12 x 24)
RECOMMENDED GROUT JOINT: 3/16"
(Overlap should not exceed 33% when installing rectangular size in a staggered brick-joint pattern)
RELATIVE PRICING: Medium

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOHS	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Field	< 0.5%	> 275 lbs.	8.0	Resistant	4 (CC65, CC66, CC67) 3 (CC68, CC69)

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Sanded grout
- Sanded cement grout
- Epoxy grout

TRIM



BULLNOSE +
P-43C9
3 x 12



COVE BASE + □
P-36C9T
6 x 12



COVE CORNER + □
PC-36C9T
6 x 1

- + Bullnose, Cove Base and Cove Corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position. Cove base trim is clay body ceramic and suitable for application in non-freezing climates only.
- Clay body ceramic.

FLOOR APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.americanolean.com/dcof.

OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●
Pool Linings	○

APPLICATION NOTES:

Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

NOTES

SPECIAL INSTALLATION REQUIREMENT: For proper bonding, medium bed mortar should be utilized in installing tiles with a dimensional length size greater than 20 x 20, large rectangles or tiles with greater dimensional thickness than normal. Back buttering tiles of this nature in the installation process will also assure proper coverage for bonding.

Since there is shade variation in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Use of a latex modified thin-set is recommended for proper installation.

All or select items within this series are made in the USA.
For more information visit www.americanolean.com.

For additional information, refer to "Factors to Consider" at <http://americanolean.com/factors-to-consider.cfm>.



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2015 AMERICAN OLEAN (10/15)



AMERICAN OLEAN®
PROVEN IN TILE™